

METRALINE | DMM16

International TRMS Multimeter

3-349-721-03
1/3.13

- Resolution: 100 μ V, 100 m Ω , 10 μ A, 10 pF, 0.1 Hz
- Precision temperature measurement (-50 ... +800 °C)
- Frequency and duty cycle measurement at 2 to 14 V signals up to 1 MHz
- Capacitance measurement
- RPM Measurement with Inductive Sensor (accessory)
- Automatic and manual measuring range selection
- Backlit digital display with additional analog scale
- Measured value memory, Hold, Max-Min value
- Overload and blown fuse indicators
- IP 40 protection
- 3 year guarantee
- Protective rubber holster (Option)
- DAkkS calibration certificate (Option)



Quality Management System



DQS certified per
DIN EN ISO 9001



German
Accreditation Body
D-K-15080-01-01
DAkkS Calibration Certificate as option



Features

Automatic Blocking Sockets (ABS) *

Automatic blocking sockets prevent incorrect connection of measurement cables and inadvertent selection of the wrong measured quantity. This significantly reduces danger to the user, the instrument and the system under test, and eliminates it entirely in many cases.

Automatic / Manual Measuring Range Selection

Measured quantities are selected with the rotary switch. The measuring range is automatically matched to measured values. The measuring range can be selected manually as well with the help of the AUTO/MAN key.

Display of Negative Values at the Analog Scale

Negative values are also displayed at the analog scale for zero-frequency quantities, allowing for observation of measured quantity fluctuation around the zero-point.

Storage of Measured Values

By pressing the **HOLD/MIN/MAX** key, the currently displayed measurement value can be „frozen“ in the display. The minimum and maximum values which were present at the input of the measuring instrument after activation of the MIN/MAX mode can be selectively "retained" with the MIN/ MAX function. The most important application is the determination of the minimum or maximum value during long-term observation of measurement quantities. MIN/MAX has no effect on the analog display; it continues to display the current measurement value.

Continuity Test

Allows for the detection of short-circuits and interrupted conductors. In addition to displaying test results, an acoustic signal can also be generated if desired.

Power Saving Circuit

The device is switched off automatically if the measured value remains unchanged for a period of approximately 10 minutes, and if none of the controls are activated during this time. Automatic shutdown can be deactivated.

Protective Cover for Harsh Conditions (Option)

The instrument is protected against damage in the event of impacts or dropping by means of a soft rubber cover with tilt stand. The rubber material also assures that the instrument does not wander if it is set up on a vibrating surface.

Duty Cycle Measurement – Measurement of Square-Wave Signals

This function makes it possible to test circuits and transmission cables by measuring the frequency and the duty cycle of pulses with amplitudes of 2 to 14 V and frequencies of 100 Hz to 10 kHz.

Voluntary Manufacturer's Guarantee

36 months for material and workmanship
1 ... 3 years for calibration (depending on application)

* Patented (patent no. DE 10 2005 062 624, US 7,439,725)

METRALINE | DMM16

International TRMS Multimeter

Characteristic Values

| Meas. Function | Measuring Range | | Resolution | Input Impedance | | Intrinsic Uncertainty at Max. Resolution under Reference Conditions | | Overload Capacity | | Meas. Function |
|---|----------------------------------|-------------------|-------------------|---------------------------|-------------------------|---|--|------------------------------------|-------|----------------------------|
| | | | | | | $\pm(\dots \% \text{ rdg.} + \dots \text{ d})$ | $\pm(\dots \% \text{ rdg.} + \dots \text{ d})$ | Value | Time | |
| V | 600 mV | | 100 μV | 10 M Ω // < 40 pF | 8.1 M Ω // 50 pF | 0.5 + 5 | 1 + 5 | 1000 V DC AC eff Sinus | Cont. | V |
| | 6 V | | 1 mV | 5.2 M Ω // < 40 pF | 4.6 M Ω // 50 pF | 0.5 + 5 | | | | |
| | 60 V | | 10 mV | 5 M Ω // < 40 pF | 4.4 M Ω // 50 pF | 0.5 + 5 | | | | |
| | 600 V | | 100 mV | 5 M Ω // < 40 pF | 4.4 M Ω // 50 pF | 0.5 + 5 | | | | |
| | 1000 V | | 1 V | 5 M Ω // < 40 pF | 4.4 M Ω // 50 pF | 0.5 + 5 | | | | |
| Voltage drop at approx. range limit | | | | | | | | | | |
| === ~ === ~ ⁵⁾ | | | | | | | | | | |
| A | 60 mA | | 10 μA | 100 mV | 100 mV | 1.0 + 5 (> 10 D) | 1.5 + 5 (> 10 D) | 1.0 A | Cont. | A |
| | 600 mA | | 100 μA | 700 mV | 700 mV | | | | | |
| | 6 A | | 1 mA | 200 mV | 200 mV | | | | | |
| | 10 A | | 10 mA | 300 mV | 300 mV | | | | | |
| Open-circuit voltage Meas. current at range limit $\pm(\dots \% \text{ rdg.} + \dots \text{ d})$ | | | | | | | | | | |
| Ω | 600 Ω | | 100 m Ω | max. 1 V | max. 250 μA | 1 + 5 ²⁾ | 1000 V DC AC eff Sinus | max. 10 s | | Ω |
| | 6 k Ω | | 1 Ω | max. 1 V | max. 100 μA | 0.7 + 3 | | | | |
| | 60 k Ω | | 10 Ω | max. 1 V | max. 12 μA | 0.7 + 3 | | | | |
| | 600 k Ω | | 100 Ω | max. 1 V | max. 1,2 μA | 0.7 + 3 | | | | |
| | 6 M Ω | | 1 k Ω | max. 1 V | max. 120 nA | 0.7 + 3 | | | | |
| 40 M Ω | | 10 k Ω | max. 1 V | max. 50 nA | 2.0 + 3 | | | | | |
| → | 2 V | | 1 mV | max. 3 V | | 1.0 + 5 | | | | → |
| 🔊 | 600 Ω | | 0.1 Ω | max. 1 V | max. 250 μA | 1.0 + 5 | | | | 🔊 |
| $\pm(\dots \% \text{ rdg.} + \dots \text{ K})$ | | | | | | | | | | |
| °C | TYP K | -50,0 ... +400 °C | 0,1 °C | | | 1.0 + 5 K ³⁾ | 1000 V DC/AC eff Sinus | max. 10 s | | °C |
| | | +401 ... +800 °C | 0,1 °C | | | 5.0 + 7 K ³⁾ | | | | |
| $\pm(\dots \% \text{ v. MW} + \dots \text{ °F})$ | | | | | | | | | | |
| °F | TYP K | -58 ... +752 °F | 0,1 °F | | | 1.0 + 9 °F ³⁾ | 1000 V DC/AC eff Sinus | max. 10 s | | °F |
| | | +753 ... +1472 °F | 1 °F | | | 5.0 + 11 °F ³⁾ | | | | |
| $\pm(\dots \% \text{ rdg.} + \dots \text{ d})$ | | | | | | | | | | |
| Hz (V~) | 100 Hz | | 0,1 Hz | | | 0.1 + 2 | 1000 V ⁶⁾ | max. 10 s | | Hz (V~) |
| | 1000 Hz | | 1 Hz | | | | | | | |
| Hz | 10 ... 100 Hz | | 0,1 Hz | | | 0.1 + 2 | 1000 V ⁶⁾ | max. 10 s | | Hz |
| | 1000 Hz | | 1 Hz | | | | | | | |
| 1 MHz | | 1 Hz | | | | | | | | |
| Measuring Voltage | | | | | | | | | | |
| % | 30 Hz ... 1kHz: 2,0 ... 98,0 | | | > 2 ... 14 V | | 0.2% v.MUL + 8 D | 1000 V ⁶⁾ | max. 10 s | | % |
| | 1 kHz ... 4 kHz: 5,0 ... 95,0 | | | | 0.2% v.MUL/kHz + 8 D | | | | | |
| | 40 kHz ... 10 kHz: 10,0 ... 90,0 | | | | 0.2% v.MUL + 8 D | | | | | |
| $\pm(\dots \% \text{ rdg.} + \dots \text{ MR})$ | | | | | | | | | | |
| Rpm | 0.060 k... 99.99 k | | 1 Rpm | Discharge Resistance | | $\pm 2 \text{ Rpm}$ | 1000 V | max. 10 s | | Rpm |
| F | 40 nF | | 10 pF | 10 M Ω | | 2.0 + 10 with zero activ | 1000 D DC AC | max. 10 s | | F |
| | 400 nF | | 100 pF | 1 M Ω | | 1.0 + 6 | | | | |
| | 4 μF | | 1 nF | 100 M Ω | | 1.0 + 6 | | | | |
| | 40 μF | | 10 nF | 12 M Ω | | 2.5 + 6 | | | | |
| | 400 μF | | 100 NF | 3 M Ω | | 5.0 + 6 | | | | |

- 1) At 0 to + 40 °C
- 2) With zero balancing, or + 35 digits without zero balancing
- 3) Without sensor
- 4) 12 A for 5 min, 16 A for 30 s
- 5) 1 ... 35 d from the zero point due to TRMS converter when probe tips are short-circuited
- 6) Power limit: frequency x voltage max. $3 \cdot 10^6 \text{ V} \cdot \text{Hz}$ @ $U > 100 \text{ V}$

Key

rdg. = reading (measured value)
d = digit
MUL = upper range limit
MR = measuring range

Reference Conditions

Ambient temperature + 23 °C \pm 2 K
Relative humidity 40 ... 60%
Measured quantity frequency 45 ... 65 Hz
Measured quantity waveshape Sinusoidal
Battery voltage 3 V \pm 0.1 V

METRALINE | DMM16

International TRMS Multimeter

Influencing Quantities and Influence Error

| Influencing Quantity | Sphere of Influence | Measured Quantity / Measuring Range | Influence Error ¹⁾ ±(... % rdg. + ... digits) |
|-----------------------------|---|-------------------------------------|--|
| Temperature | 0 °C ... +21 °C and +25 °C ... +40 °C | 600 mV \equiv | 1.0 + 3 |
| | | 6 ... 600 V \equiv | 0.15 + 1 |
| | | 1000 V \equiv | 0.2 + 1 |
| | | V \sim | 0.4 + 2 |
| | | 0 Ω ²⁾ | 0.15 + 2 |
| | | 600 Ω ²⁾ | 0.25 + 2 |
| | | 6 k Ω ... 6 M Ω | 0.15 + 1 |
| | | 40 M Ω | 1.0 + 1 |
| | | mADC, ADC | 0.5 + 1 |
| | | mAAC, AAC | 0.75 + 1 |
| | | -50 ... +200 °C | 0.5 K + 2 |
| +200 ... +400 °C | 0.5 + 2 | | |
| Measured Quantity Frequency | > 30 Hz ... 45 Hz | A \sim | 2.0 + 10 |
| | > 65 Hz ... 1 kHz | 60 / 600 mA / 6 A | 1.5 + 10 |
| | | 10 A | 2 + 10 |
| | > 30 Hz ... 45 Hz | 600 mV | 3 + 10 |
| | | 6 / 60 / 600 V | 2.5 + 10 |
| | | 1000 V | 3.5 + 20 |
| | | 600 mV | 35 + 20 |
| | > 65 Hz ... 500 Hz | 6 / 60 V | 2.5 + 10 |
| | | 600 V | 3 + 20 |
| | > 65 Hz ... 800 Hz | 600 V | 3 + 20 |
| 1000 V | | 3.5 + 20 | |

| Influencing Quantity | Sphere of Influence | Measured Quantity / Measuring Range | Influence Error |
|----------------------|--|--|---------------------------|
| Battery Voltage | \rightarrow ³⁾ ... < 2.9 V > 3.1 V ... 3.6 V | V \equiv | ± 2 Digits |
| | | V \sim | ± 4 Digits |
| | | A \equiv | ± 4 Digits |
| | | A \sim | ± 6 Digits |
| | | 60 Ω / 600 Ω / °C | ± 4 Digits |
| | | 6 k Ω ... 40 M Ω | ± 3 Digits |
| Relative Humidity | 75% 3 days Instrument off | V \approx A \approx Ω °C | 1 x intrinsic uncertainty |
| HOLD | — | — | ± 1 Digits |
| MIN / MAX | — | V \approx , A \approx | ± 2 Digits |

¹⁾ For temperature: specified error valid starting with temperature changes as of 10 K.
For frequency: specified error valid starting with display values as of 300 digits.


²⁾ With zero balancing

³⁾ After the \rightarrow symbol appears at the display

| Influencing Quantity | Sphere of Influence | Measuring Ranges | Damping |
|----------------------------------|--|---|----------|
| Common Mode Interference Voltage | Interference quantity max. 600 V \sim | V \equiv | > 120 dB |
| | | 3 V \sim , 30 V \sim | > 80 dB |
| | Interference quantity max. 600 V \sim 50 Hz, 60 Hz sine | 300 V \sim | > 70 dB |
| | | 600 V \sim | > 60 dB |
| Series Mode Interference Voltage | Interference quantity: V \sim , respective nominal value of the measuring range, max. 600 V \sim , 50 Hz, 60 Hz sine | V \equiv | > 50 dB |
| | | Interference quantity max. 600 V \equiv | V \sim |

Crestfaktor CF

Test signal: Rectangle 55 Hz, no DC component

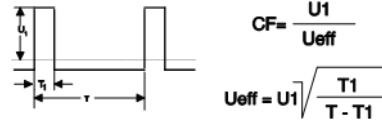

| Influencing Quantity | Sphere of Influence | Measured Quantity / Measuring Range | Influence Error |
|----------------------|---------------------|-------------------------------------|-----------------|
| Crest factor CF | 1.5 < CF ≤ 2 | 6 V, 60 V, 600 V, 1000 V \sim | ± 1 % rdg. |
| | 2 < CF ≤ 4 | — | ± 5 % rdg. |

The admissible crest factor CF of the alternating quantity to be measured depends on the display value.

Crest factor 4 at the end of range, it is increased accordingly when the range is reduced. However, due to input protection, voltage is limited to 1000 V, therefore the admissible crest factor in the 600 V ranges is half as high.

Power limiting: voltage x frequency max. 3×10^6 V x Hz.

Response Time (after manual range selection)

| Measured Quantity / Measuring Range | Response Time | | Measured Quantity Step Function |
|--|----------------|-----------------|--|
| | Analog Display | Digital Display | |
| V \equiv , V \sim , A \equiv , A \sim | 0.7 s | 1.5 s | from 0 to 80% of the upper range limit |
| 600 Ω ... 6 M Ω | 1.5 s | 2 s | from ∞ to 50% of the upper range limit |
| 40 M Ω | 4 s | 5 s | |
| \rightarrow) | — | 1.5 s | |
| \square) | — | < 50 ms | |
| °C | — | max. 3 s | from 0 to 50% of the upper range limit |
| F | — | max. 5 | |

Display

LCD panel (65 mm x 30 mm) with analog and digital display including unit of measure, type of current and various special functions

Analog:

Display LCD scale with pointer
Scale length 55 mm in all ranges
Scaling 0 ... ± 60 with 61 scale divisions in all ranges

Polarity display With automatic switching
Overflow display Triangle
Measuring rate 30 measurements per second

Digital:

Display / char. height 7-segment characters / 15 mm
Number of places $3^6/7$ -place \approx , 6000 steps
Overflow display „D.L.“ appears
Polarity display “-” sign is displayed if plus pole is connected to \perp

Measuring rate 3 measurements per second

Electromagnetic Compatibility (EMC)

Interference emission EN 61326-1: 2006 class B
Interference immunity EN 61326-1: 2006
EN 61326-2-1:2006

METRALINE | DMM16

International TRMS Multimeter

Power Supply

| | |
|--------------|--|
| Battery | 2 x 1.5 V AA size batteries, alkaline manganese per IEC LR6 or equivalent rechargeable NiCd battery |
| Service life | With alkaline manganese: approx. 750 hours for V $\overline{\text{---}}$, A $\overline{\text{---}}$ approx. 200 hours for V \sim , A \sim |
| Battery test | + is displayed automatically if battery voltage drops to below approximately 2.1 V. |

Electrical Safety

| | |
|--------------------|---|
| Safety class | II per IEC 61010-1:2010/EN 61010-1:2010/VDE 0411-1:2011 |
| Measuring category | 1000 V CAT III, 600 V CAT IV |
| Nominal voltage | 1000 IV |
| Pollution degree | 2 |
| Test voltage | 6.7 kV \sim per IEC 61010-1/EN 61010-1 |

Fuses

| | |
|--|--|
| Fuse links for all ranges up to 600 mA | FF 1.6 A/1000 V, 6.3 mm x 32 mm, switching capacity: 10 kA at 1000 V \sim with ohmic load, protects all current measuring ranges up to 600 mA in combination with power diodes |
| Fuse links for all ranges up to 10 A | FF 10 A/1000 V, 10 mm x 38 mm, switching capacity: 30 kA at 1000 V with ohmic load, protects 6A and 10 A ranges to 1000 V |

Data Interface

| | |
|-------------------|--|
| Type | Optical via infrared light through the housing |
| Data transmission | Serial, bidirectional (not IrDa compatible) |
| Protocol | Device specific |
| Baud rate | 9600 baud |

The USB plug-in interface adapter (see accessories) is used for adaptation to the PC's USB port.

Ambient Conditions

| | |
|---------------------|--------------------------------------|
| Accuracy range | 0 °C ... + 40 °C |
| Operating temp. | -10 °C ... + 50 °C |
| Storage temperature | -25 °C ... + 70 °C without batteries |
| Relative humidity | 45 ... 75%, no condensation allowed |
| Elevation | to 2000 m |

Mechanical Design

| | |
|------------|---|
| Protection | IP 40, IP 20 at the connector jacks per DIN VDE 0470, part 1 / EN 60529 |
| Dimensions | 84 mm x 195 mm x 35 mm |
| Weight | Approx. 350 gr. with battery |

Applicable Regulations and Standards

| | |
|---------------------------------------|---|
| IEC 61010-1/EN 61010-1/ VDE 0411-1 | Safety requirements for electrical equipment for measurement, control and laboratory use |
| EN 60529 VDE 0470, Part 1 | Test instruments and test procedures Protection provided by enclosures (IP code) |
| DIN EN 61326-2-1 VDE 0843-02-2-1 | Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 2-1: Particular requirements for sensitive test and measurement equipment |
| DIN EN 60529 DIN VDE 0470 Part 1 | Test Instruments and test procedures – Degree of protection provided by enclosures (IP code) |

Standard Equipment

- 1 TRMS-digital multimeter
- 2 2 x 1.5 V AA size batteries
- 1 set of measurement cables KS17-2
- 1 short-form operating instructions

Detailed operating instructions are available on our website www.gossenmetrawatt.com.

Order Information

| Description | Type | Article Number |
|---|-------------------|-----------------|
| Analog-digital multimeter with IR interface, standard equipment see above | METRALINE DMM16 | M196A |
| Accessories | | |
| protective rubber holster with carrying strap | GH18 | GTZ3212000R0001 |
| DAkKS calibration certificate for METRALINE DMM16 | DAkKS | Z196A |
| Fast reacting surface temperature sensor, type K (NiCr-Ni) -50 ... +400 °C | TF400SURFACE | Z102E |
| Clip-on current transformer, 30 mA ... 150 A \sim , 1000:1, \pm 2.5 %, 1 mA/A | WZ12D | Z219D |
| Clip-on current sensor 60 / 600 A $\overline{\text{---}}$, 40 / 400 A \sim , 10 mV / A or 1 mV / A $\overline{\text{---}}$ | Z13B | Z213B |
| Carrying pouch | F829 | GTZ3301000R0003 |
| Imitation leather carrying pouch for one METRAHit [®] and accessories | F836 | GTZ3302000R0001 |
| Imitation leather carrying pouch for two METRAHit [®] , adapter and accessories | F840 | GTZ3302001R0001 |
| Hard case for 1 METRAHit [®] and accessories | HC20 | Z113A |
| Hard case for two METRAHit [®] , adapter and accessories | HC30 | Z113B |
| Fuses (pack of 10) | FF 1.6 A / 1000 V | Z109C |
| Fuses (pack of 10) | FF 10 A / 1000 V | Z109L |

For additional information on accessories, please refer to

- our „Measuring Instruments and Testers“ catalogue
- our website www.gossenmetrawatt.com